



M2500 SERIE 1 ½” FIRE HOSE RACK ASSEMBLIES

ASSEMBLY COMPONENTS



M2792

Red swing hose rack. UL/ULC Listed and FM Approved.

M4070

UL/ULC Listed and FM Approved 300 lb pressure tested approved valve. Heavy Duty 1½” angle hose with hydrolator valve.

M2755

Brass Male to Male Hose rack nipple.

M2962

UL/ULC Listed and FM Approved 1½” Brass combination fog nozzle with bumper.

M2915

UL/ULC Listed and FM Approved 1½” 500 PSI proof pressure fire hose.

M2930

1½” Brass Expansion Ring Couplings.

M1985

Instructional Label.

FUNCTIONS

The M2500 Fire Hose Rack Assembly is a Class II Service and is an immediate and readily available means of controlling and suppressing fire by one person.

The semi-automatic swing fire hose rack release mechanism, keeping water out of the hose (when valve is open) until the last fold is released.



www.amerex-mexico.com


ventas@amerex-mexico.com

Conmutador: (81) 1534.9214

Maxfire

WAXFILB

MODEL	Hose Length Ft.	Valve Size In.	Hose Dia. In.	Dimensions				
				A In.	B In.	C In.	D In.	Pins
M2507	75	1½	1½	29½"	29"	21"	4¼"	20
M2510	100	1½	1½	29½"	29"	21"	4¼"	25

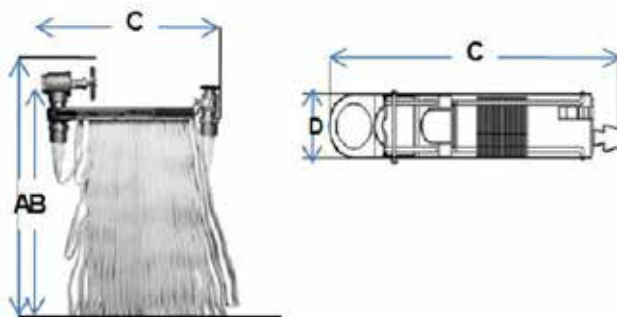

www.amerex-mexico.com
ventas@amerex-mexico.com
 Conmutador: (81) 1534.9214