

SPECIFICATIONS

22ga. box; 20ga. tubular steel door with 20 ga. frame and a continuous steel hinge. All components are powder-coated with an electrostatically-applied, thermally-fused, recoatable white polyester finish. All glass door styles provided with clear tempered safety glass. Wall mounting and size of cabinet as selected by model number.

REGULARLY FURNISHED

FIRE EXTINGUISHER CABINET - For use with Portable Fire Extinguisher

MODEL SELECTION

- 1702 Recessed
- 1704 Recessed
- 1706 Recessed
- 1708 Recessed
- 1712 Trimless
- 1714 Trimless
- 1716 Trimless
- 1718 Trimless
- 1724 Semi-Recessed
- 1734 Semi-Recessed
- 1736 Semi-Recessed
- 1738 Semi-Recessed
- 1746 Semi-Recessed
- 1748 Semi-Recessed
- 1754 Surface
- 1756 Surface
- 1758 Surface

PRODUCT OPTIONS

DOOR AND FRAME MATERIAL:

- AL ALUMINUM: Clear Anodized Finish
- SS STAINLESS STEEL: 304 w/ #4 Finish
- PB BRASS: Polished Finish
- BZ BRONZE: Call for Options

FINISHES:

- ALUMINUM: Duranodic Finish
 - Light Medium Dark
- STAINLESS STEEL: Finish as Specified
 - 304 w/ #6 Dull Satin 304 w/ #8 Mirror
- RED: Powder Coat
- CUSTOMER COLORS _____ (Specify)



PRODUCT OPTIONS (cont.)

CABINET MODIFICATIONS:

- DANA TYPE: Frameless Concealed Hinge and Handle Construction (recessed cabinet only)
- DP Duplex Cabinet

DOOR STYLES:

- A Full Glass, w/ Tempered Safety Glass
- B Break-Glass, w/lock & Break Rite® Handle
- D Duo-Panel w/ Tempered Safety Glass
- DV Duo-Vertical Panel w/ Tempered Safety Glass
- DVL Duo-Vertical Panel w/ Lock, TSG & Break Rite® Handle.
- E Tempered Safety Glass (25 sq. in.) w/ Break Rite® Handle
- F Flush Solid Metal
- FS Flush Solid Metal w/ lock
- J Insert Panel
- (Specify) Optional inserts for glass-style doors

**NOTE: DOOR STYLES -A, -D, -DV, -F, & -J PROVIDED w/ LEVER HANDLE/CAM LATCH

**NOTE: ALL GLASS DOOR STYLES PROVIDED WITH CLEAR TEMPERED SAFETY GLASS IN COMPLIANCE WITH ANSI Z97-1-1984

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

1700 SERIES

Date: 03/27/14

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION




POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890


Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.potterroemer.com

MODEL DIMENSIONS

Model No.	Wall Mounting	Inside Box Dimensions			Overall Frame		Wall Opening Required			Trim T	For Use With These Extinguishers Model No.	ADA 
		K	L	M	N	O	W I D T H	H E I G H T	D E P T H			
1702	Recessed	9	24	5	11-3/4	26-3/4	10	25	5	1/2	3002, 3005, 3005-3, 3101, 3302, 3305, 3305-3	Yes
1704	Recessed	9	24	5-3/4	11-3/4	26-3/4	10	25	5-3/4	1/2	3006, 3010, 3306, 3102, 3310, 3405	Yes
1706	Recessed	12	27	8	14-3/4	29-3/4	13	28	8	1/2	3020, 3202, 3103, 3320, 3410	Yes
1708	Recessed	12	36	8	15-3/4	39-3/4	13	37	8-1/2	1/2	3020, 3202, 3320, 3410, 3415	Yes
1712	Trimless	9	24	5	11-3/4	26-3/4	10	25	6-1/8	-	3002, 3005, 3005-3, 3101, 3302, 3305, 3305-3	Yes
1714	Trimless	9	24	5-3/4	11-3/4	26-3/4	10	25	6-7/8	-	3006, 3010, 3102, 3306, 3310, 3405	Yes
1716	Trimless	12	27	8	14-3/4	29-3/4	13	28	9-1/4	-	3020, 3103, 3202, 3320, 3410	Yes
1718	Trimless	12	36	8	15	39	13	37	9-1/4	-	3020, 3202, 3320, 3410, 3415	Yes
1724	Semi-Recessed	9	24	5-3/4	11-3/4	26-3/4	10	25	4-1/4	2	3006, 3010, 3102, 3306, 3310, 3405	Yes
1734	Semi-Recessed	9	24	5-3/4	11-3/4	26-3/4	10	25	3-1/4	3	3006, 3010, 3102, 3306, 3310, 3405	Yes
1736	Semi-Recessed	12	27	8	14-3/4	29-3/4	13	28	5-1/2	3	3020, 3103, 3202, 3320, 3410	Yes
1738	Semi-Recessed	12	36	8	15-1/2	39-1/2	13	37	5-3/4	2-3/4	3020, 3202, 3320, 3410, 3415	Yes
1746	Semi-Recessed	12	27	8	14-3/4	29-3/4	13	28	3-1/2	5	3020, 3202, 3320, 3410	No
1748	Semi-Recessed	12	36	8	15-1/2	39-1/2	13	28	3-3/4	4-3/4	3020, 3202, 3320, 3410, 3415	No
1754	Surface	11-1/2	26-1/2	5-3/4	-	-	-	-	-	5-3/4	3006, 3010, 3102, 3306, 3310, 3405	No
1756	Surface	14-1/2	29-1/4	8	-	-	-	-	-	8	3020, 3103, 3202, 3320, 3410	No
1758	Surface	14	38	9-1/4	-	-	-	-	-	9-1/4	3020, 3202, 3320, 3410, 3415	No

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED

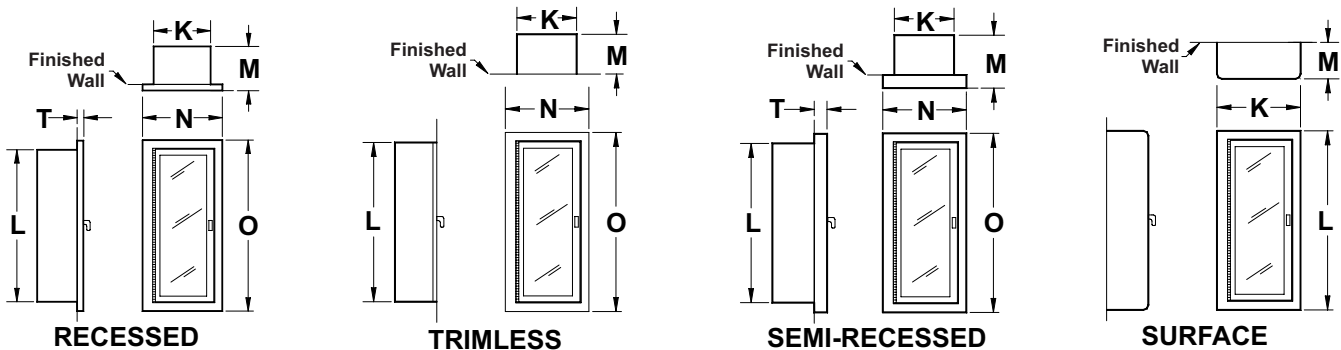

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer - Fire Pro assumes no responsibility for use of void or superseded data. © Copyright Potter Roemer - Fire Pro, Member of Morris Group International™ Please visit potterroemer.com for most current specifications.

1700 SERIES

Date: 03/27/14

MEMBERSHIP



FIRE EQUIPMENT
MANUFACTURERS'
ASSOCIATION

ONFSA
NATIONAL IRRE SPRINKLER ASSOCIATION, INC.



CASPE
American Society of
Plumbing Engineers



POTTER ROEMER/FIRE PRO

Headquarters:
P.O. Box 3527
City of Industry, CA
91744 U.S.A.
Los Angeles Area
800-366-3473
626-855-4890

Also in:
New York (800) 526-4592
Chicago (800) 547-3473
Atlanta (800) 762-0542
Miami (866) 961-3473
Dallas (866) 644-3473

www.potterroemer.com